## **Benq**

# RE7504

### **Essential Series**











The EDLA-certified RE04 seamlessly integrates Google services with BenQ's reliable hardware and software.
Easily access your favourite education apps through the Google Play Store, as well as Google and Microsoft apps and tools to enhance your lessons.



Safeguard your data through the RE04's secure login options and access controls, regular system updates, and built-in **Google Play Protect** and Safe Browsing measures.



Eye care technologies, including the RE04's low blue light filter and flickerfree screen, help reduce eye strain in class, while its antiglare 4K screen ensures clear

Panel	Screensize	75"
	Resolution	4K UHD 3840 x 2160
	Brightness (typ.) w/ glass	400 nits
	Contrast ratio (typ.)	1200:1
	Dynamic contrast ratio	30,000:1
	Viewing angle (H/V)	178°
	Response time (G-t-G)	8 ms
	Backlight life (hrs)	50,000
	Panel surface	AG, Haze 25%
	Operating hours	18 / 7
	Orientation	Landscape
Platform solution	System memory	8GB
	Storage	32GB
	os	Android 13.0
	GMS integration	Yes
Power	Power supply	100V~240V, 50-60Hz
	Typical power consumption (W/h)	73.9
	AC power switch	Yes
	Wake up	LAN / HDMI / VGA
Glass	Technology	Precision IR
	Number of touch points	up to 40
	Interface	USB Type B x 2
	Tempered glass	3.2 mm
	Hardness	9H
	AG coating	Yes
ClassroomCare® Technology		
	Eye care solution: flicker-free & low blue light (TÜV-certified)	Yes
	blue light (TÜV-certified) Air quality sensors & air ioniser	Yes
Technology	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen	No No
	blue light (TÜV-certified) Air quality sensors & air ioniser	No
Technology	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity	No No 0°C ~ 40°C 20% ~ 80% RH non-condensing
Technology	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature	No No 0°C ~ 40°C 20% ~ 80% RH non-condensing ENERGY STAR* 8.0-certified
Technology	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity	No No 0°C ~ 40°C 20% ~ 80% RH non-condensing
Technology	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency	No No 0°C ~ 40°C 20% ~ 80% RH non-condensing ENERGY STAR* 8.0-certified VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1,
Technology	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input	No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1,  Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1,
Technology  Environment	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1,  Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1,  SPDIF (Optical) x 1
Technology	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)
Technology	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)
Technology	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232 RJ45 (LAN)	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)  x 1  x 2 (Android / OPS) up to 1000Mbps
Environment  Connectivity	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232 RJ45 (LAN) Remote controller	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)  x 1  x 2 (Android / OPS) up to 1000Mbps x 1
Environment  Connectivity	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232 RJ45 (LAN) Remote controller Built-in speaker	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)  x 1  x 2 (Android / OPS) up to 1000Mbps  x 1  20W x 2
Technology  Environment  Connectivity  Audio	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)  x 1  x 2 (Android / OPS) up to 1000Mbps  x 1  20W x 2  No
Technology  Environment  Connectivity  Audio	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm)	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)  x 1  x 2 (Android / OPS) up to 1000Mbps  x 1  20W x 2  No  1716.5 × 1041.6 × 87.7
Technology  Environment  Connectivity  Audio	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm) Net / Gross weight (kg)	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)  x 1  x 2 (Android / OPS) up to 1000Mbps  x 1  20W x 2  No  1716.5 × 1041.6 × 87.7  50.2 / 64.9
Technology  Environment  Connectivity  Audio	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm) Net / Gross weight (kg) Bezel width (mm) Wall mounting (VESA)	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)  x 1  x 2 (Android / OPS) up to 1000Mbps  x 1  20W x 2  No  1716.5 × 1041.6 × 87.7  50.2 / 64.9  33   48.3   17.2   17.2  VESA 800 × 400 mm ( 4 × M8 × 251),
Technology  Environment  Connectivity  Audio	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm) Net / Gross weight (kg) Bezel width (mm) Wall mounting (VESA) (screw type / max. length)	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)  x 1  x 2 (Android / OPS) up to 1000Mbps  x 1  20W x 2  No  1716.5 × 1041.6 × 87.7  50.2 / 64.9  33   48.3   17.2   17.2  VESA 800 × 400 mm ( 4 × M8 × 25L), wall mount kit included
Technology  Environment  Connectivity  Audio	biue light (TÜV-certified) Air quality sensors & air ioniser Germ-resistant screen Operating temperature Operating humidity Energy efficiency Input Output USB RS232 RJ45 (LAN) Remote controller Built-in speaker Array microphones Screen dimension (mm) Net / Gross weight (kg) Bezel width (mm) Wall mounting (VESA) (screw type / max. length) OPS slot Micro SD reader w/ cover & screw lock	No  No  0°C ~ 40°C  20% ~ 80% RH non-condensing  ENERGY STAR* 8.0-certified  VGA x 1, HDMI 2.0 x 3, DisplayPort 1.2 x 1, Mic-in (3.5 mm) x 1, PC Audio (3.5 mm) x 1  HDMI 2.0 x 1, Earphone-audio (3.5 mm) x 1, SPDIF (Optical) x 1  Type A x 4 (2.0 x 2 / 3.0 x 2), Type B x 2 (2.0), Type C x 2 (2.0 x 1 / 3.0 (PD 65 W) x 1)  x 2 (Android / OPS) up to 1000Mbps  x 1  20W x 2  No  1716.5 × 1041.6 × 87.7  50.2 / 64.9  33   48.3   17.2   17.2  VESA 800 × 400 mm (4 × M8 × 25L), wall mount kit included  Yes

images every time.

### **SOFTWARE**



Save lessons in editable whiteboard files (IWB) with Cloud Whiteboarding. Google Classroom is integrated with EZWrite WEB.



### InstaShare 2

Wireless screen sharing & casting from any device. Share several screens simultaneously, with different types of content.



### X-Sign Broadcast

Announcement system with cross-campus communication. Send visual alerts, warnings, and videos to all or one specific device.



Account Management System to conveniently load and access your account and cloud storage from any BenQ display.



Device Management Solution centrally oversees all displays to get real-time status information, deploy OTA updates & more.

### **INPUT AND OUTPUT TERMINALS**

















### SENSOR & KEYPAD BUTTONS





SECURED WIFI DONGLE INPUT PORT









SIDE I/O

















SD CARD SLOT

### DOWN I/O



RS232



SPDIF







PC AUDIO-IN



VGA

USB 2.0 USB-C 2.0



USB 2.0










LAN-IN






### **DIMENSIONS (MM)**

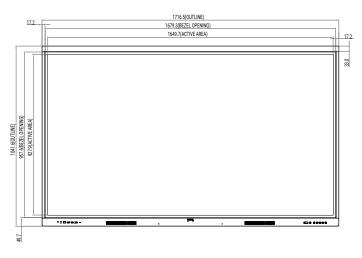





# **Benq**

© 2024 BenQ Corp. Specifications may vary by region, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names, trademarks and logos of third parties which are the properties of the third parties respectively.

